


Installation instruction Evo Flasher

No time for manuals? No problem, this will only take a few minutes of your time to read it and the installation of your new Evo Flasher is done fast and easy :-)

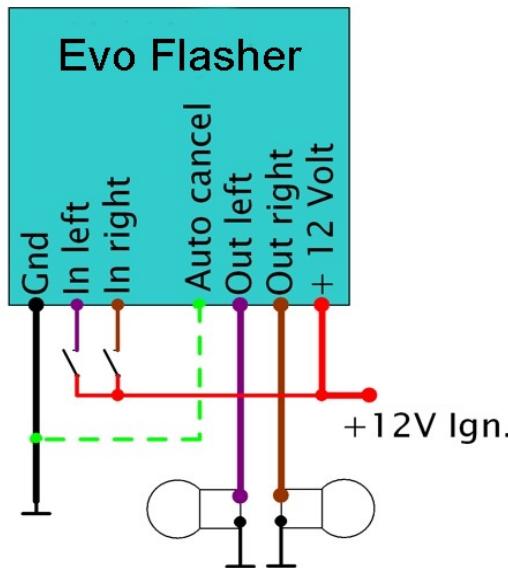

Color	Description
Violet	Input for the left flasher. Just connect it to your button and wire the other button cable to plus 12 Volt ignition. A press on the button will switch on or off the flashing function.
Brown	Input for the right flasher. Just connect it to your button and wire the other button cable to plus 12 Volt ignition. By the way a simultan press on both buttons activate an emergency flasher function.
Green	Auto Cancel function. The flashers switch off after 4 times if you press the button below 0,5 seconds. The flashers switch off after 40 times if you press and hold the button for more than 0,5 second. You can disable the Auto Cancel function if you wire this cable to ground.
Red	+ 12 Power
Violet	Output left flasher
Brown	Output right flasher
Black	Ground

Note:

The outputs can control all kind of 12 Volt led flashers and "traditional" halogen bulbs up to 60 Watt per side.

The Evo Flasher should be installed by professional well trained engineers. Please check your local regulations regarding the traffic light rules in your country before use the Evo Flasher in your bike. Please be aware that we are not responsible for any hazards, damages or disadvantages due to the use of this device. We also declare that the Evo Flasher is conform to the CE and ROHS regulations for the European market.

We tried to keep the functions of the Evo Flasher and this manual as simple as possible. However, please don't hesitate to contact us at info@elektronikbox.de if you have any questions during the installation.

We wish you to have a lot of fun with your new Evo Flasher in your bike and of course always Ride Safe!