


Installation instruction Micro - Relay

No time for manuals? No problem, this will only take a few minutes of your time to read it and the installation of your new Micro - Relay is done fast and easy :-)

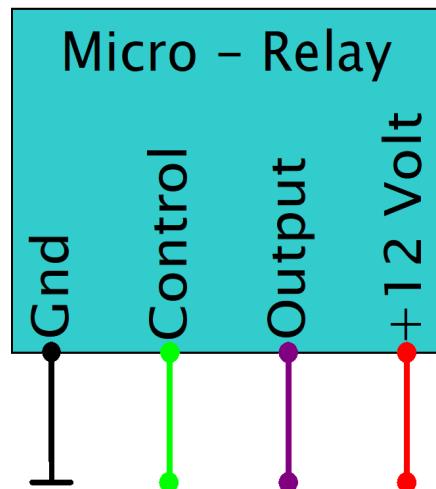

Color	Description
Green (thin)	Button - or switch input. This cable is wired to the switch or button. The other cable of the button is wired to plus 12 Volt.
Red	+ 12 Power
Violet	Load output. It switch 12 Volt to the load when the input cable is switched to plus 12 Volt.
Black	Ground

Note:

The output can supply 20 Ampere permanent to the load. Please note that the Micro - Relay should be wired with a bit distance to the ignition circuit in order to prevent the module for unwanted „funny“ reactions.

The Micro - Relay was developed to be used on show bikes and racing bikes. It should be installed by professional well trained mechanics only. Please check your local regulations regarding the traffic light rules in your country before of the use of the Micro - Relay in your bike. Please be aware that we are not responsible for any hazards, damages or disadvantages due to the use of this device.

We tried to keep the functions of the Micro Relay and this manual as simple as possible. However, please don't hesitate to contact us at info@elektronikbox.de if you have any questions during the installation.

We wish you to have a lot of fun with your new Micro - Relay in your bike and of course always Ride Safe!